



# PLT<sup>®</sup> Line Retrieval



Anchor Handling  
Emergency Towing  
Bunkering Operations

Complies with US/CAN transport regulations.

|              |   |   |
|--------------|---|---|
| Article 1005 | PLT Launching Unit  | 1 |
|              | 1 Air Cylinder, 300bars/4350psi or 200bars/2900psi  |   |
|              | 1 Launching Unit  |   |
|              | 1 Cover for air cylinder  |   |
| Article 3303 | Launching Tube 125/150  | 1 |
| Article 7002 | PLT Line Pick-up Grapple  | 1 |
| Article 6203 | Line box 5mm HMPE   | 1 |
|              | Linebox containing Line 5mm Braided Dyneema, Art No 6103. 100/120m. Floats and has very little elongation under stress. |   |
|              | Breaking strength of the line: 9806N (1000kg).  |   |
|              | Other options of line on request  |   |
|              | User Manual and USB stick included  |   |

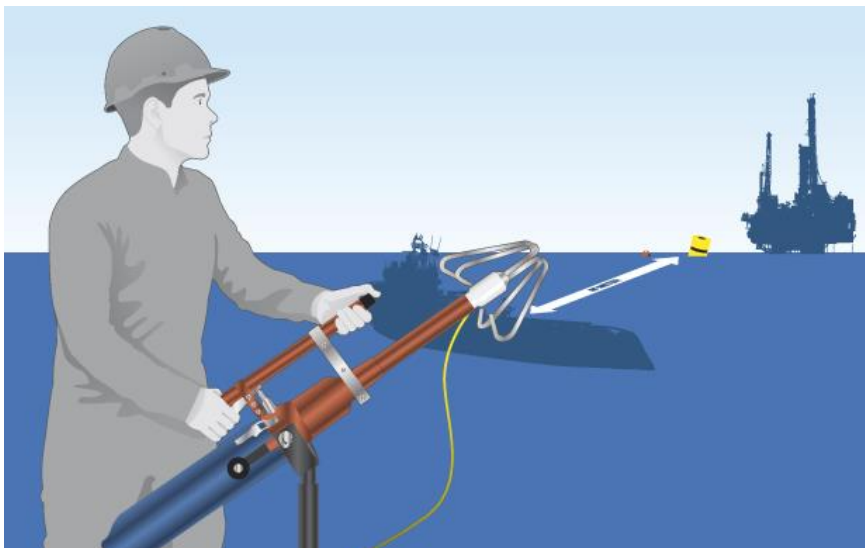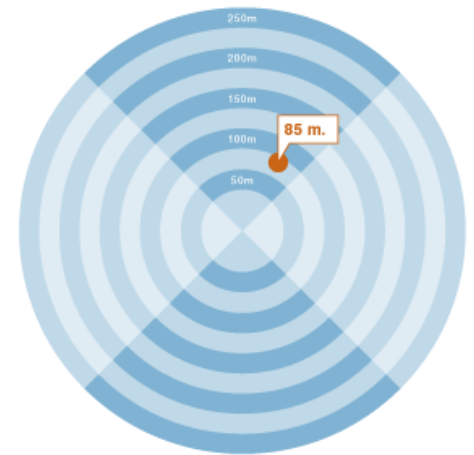

## Operations

The PLT is used by Anchor Handlers to safely and effectively grab the anchor buoy softline. This is done by having a secondary small buoy attached to the free end of the softline.

You can launch the Line Pick-up Grapple up to 85 meters from a safe and elevated spot on your vessel.